



# VMF-FS AND ASSOCIATED PARTS

## REVERSED RUBBER MOLDED

### IN-LINE SERIES

Material: Special Neoprene, Molded  
 Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488  
 Voltage Rating: See specific configuration  
 Pressure Rating, Mated: up to 20,000 psi

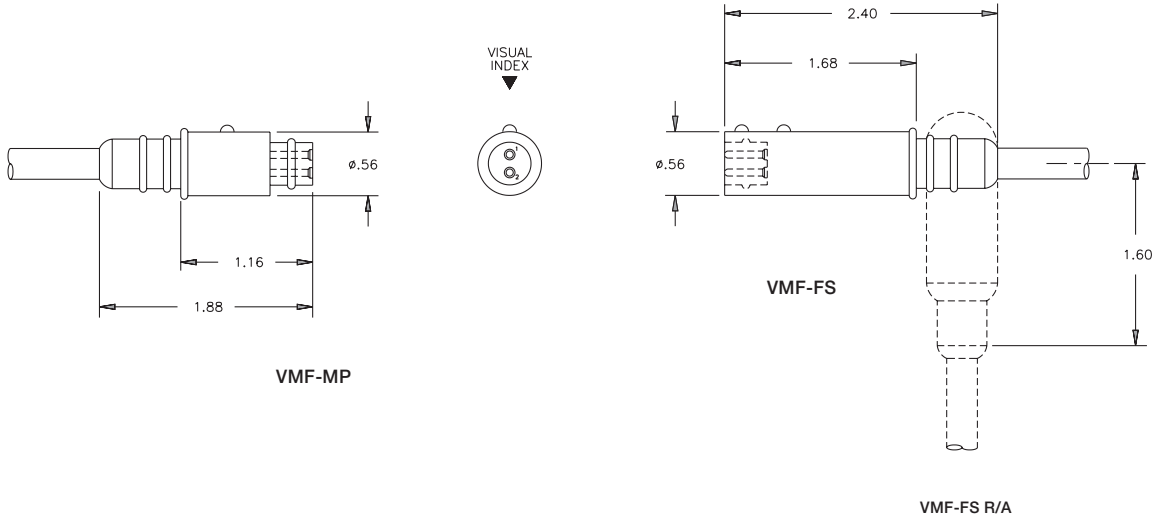

VMF-C-FS  
 600 VDC  
 CABLE:  
 CN4 or CN5



VMF-1-FS  
 600 VDC  
 CABLE:  
 18/1SO or  
 EQUIVALENT



VMF-2-FS  
 300 VDC  
 CABLE:  
 18/2 SJO

### LOCKING SLEEVES

VSF-MLS-D (AVAILABLE FOR VMF-MP)  
 VSF-FLS-D (AVAILABLE FOR VMF-FS, VMF-FS-R/A)

### DUMMY CONNECTORS

Note: Specify number of conductors when ordering

VMF-FSD-HP MATES TO VMF-MP  
 VMF-FSD-LP MATES TO VMF-MP  
 VMF-MPD MATES TO VMF-FS & VMF-FS -R/A

MATERIAL: SPECIAL NEOPRENE, MOLDED  
 PRESSURE RATING, MATED:  
 VMF-MPD 10,000 PSI

VMF-FSD-HP (HIGH PRESSURE, 4,000-10,000 PSI CONTACT REQUIRED)  
 VMF-FSD-LP (LOW PRESSURE, ≤ 4,000 PSI NO CONTACT REQUIRED)